

## ACT320SMX-4

The **ACT320SMX-4** is a low cost, 4 pad, high quality, low aging 3X2.5mm SMD Crystal in a ceramic base / metal lid package, seam welded for good long term reliability. The device has the lid grounded via the package to reduce EMI issues. The wide frequency range and specification options ensure suitability for many applications.

### APPLICATIONS:

Bluetooth, WLAN, PDA, Pagers, Card readers, Cellular, PC Accessories, Notebook, Audio-visual, PCMCIA, MP3, Consumer & Communications.



### Specification

| Parameter                    | Symbol         | Specification                                         | Condition                                   |
|------------------------------|----------------|-------------------------------------------------------|---------------------------------------------|
| Frequency Range              | fo             | 12.000MHz~ 54.000MHz                                  | Please specify                              |
| Frequency Tolerance (@25°C)  | $\Delta f/f_0$ | $\pm 10, \pm 15, \pm 20, \pm 30$ & $\pm 50$ ppm(Std ) | Please specify                              |
| Stability over temp range    | Tc             | $\pm 5$ ppm ~ 50ppm (See table 1&2)                   | Please specify                              |
| Temp Operating Range         | Topr           | 0~+50°C ~ -40~+85°C ( See table 1& 2)                 | Please specify                              |
| Temp Storage Range           | Tstg           | -40 ~+85°C                                            |                                             |
| Equivalent Series Resistance | ESR            | See table 1                                           |                                             |
| Load Capacitance             | CL             | 8pF ~ 50pF & Series                                   | (16,20 & 30pF Std. Please specify )         |
| Shunt Capacitance            | C0             | 5pF max                                               |                                             |
| Drive Level                  | DL             | 10 $\mu$ W Typ, 100 $\mu$ W max                       | (Custom to 150 $\mu$ W available - Enquire) |
| Drive Level Dependency       | DLD            | DLD2 <10 $\Omega$ (min-max ratio)<br>FDLD <10ppm      | 0.01, ~100 $\mu$ W 6 steps minimum          |
| Insulation Resistance        | IR             | 500M $\Omega$ min                                     | @100V DC                                    |
| Aging                        | Fa             | $\pm 3$ ppm per year **                               | (First year max @ 25°C)                     |


\*\* aging  $\pm 1.00$ ppm /year device available, to order, as a "semi-custom" part - Please enquire.

Table 1\*

ESR and available stabilities for temperature range -40 to+85°C

| Frequency range        | Max ESR     | Min Tolerance Available | Tightest Stability v Temperature Available             |
|------------------------|-------------|-------------------------|--------------------------------------------------------|
| 12MHz $\leq$ fo <15MHz | 80 $\Omega$ | $\pm 10$ ppm            | -40~+85°C // $\pm 30$ ppm<br>-20~+70°C // $\pm 10$ ppm |
| 15MHz $\leq$ fo <19MHz | 70 $\Omega$ | $\pm 10$ ppm            | -40~+85°C // $\pm 20$ ppm<br>-20~+70°C // $\pm 10$ ppm |
| 19MHz $\leq$ fo <22MHz | 50 $\Omega$ | $\pm 10$ ppm            | -40~+85°C // $\pm 20$ ppm<br>-20~+70°C // $\pm 10$ ppm |
| 22MHz $\leq$ fo <25MHz | 40 $\Omega$ | $\pm 10$ ppm            | -40~+85°C // $\pm 20$ ppm<br>-20~+70°C // $\pm 10$ ppm |
| 25MHz $\leq$ fo <32MHz | 30 $\Omega$ | $\pm 10$ ppm            | -40~+85°C // $\pm 15$ ppm<br>-20~+70°C // $\pm 10$ ppm |
| 32MHz $\leq$ fo <54MHz | 25 $\Omega$ | $\pm 10$ ppm            | -40~+85°C // $\pm 15$ ppm<br>-20~+70°C // $\pm 10$ ppm |

### Dimensions (mm)

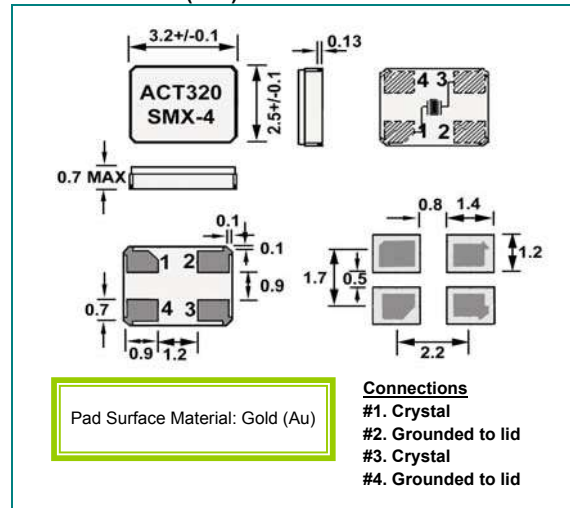

\* Tighter ESR may be available please enquire.

Table 2 Available stabilities

| Stability<br>Temp | +/- 5ppm | +/- 10ppm | +/- 15ppm | +/- 20ppm | $\geq$ +/- 30ppm |                                                |
|-------------------|----------|-----------|-----------|-----------|------------------|------------------------------------------------|
| 0~+50°C           | ✓        | ✓         | ✓         | ✓         | ✓                | ✓ Available stabilities                        |
| -10+60°C          | ✓        | ✓         | ✓         | ✓         | ✓                |                                                |
| -20~+70°C         |          | ✓         | ✓         | ✓         | ✓                | ✓ Only available for frequencies $\geq 30$ MHz |
| -20~+85°C         |          |           | ✓         | ✓         | ✓                |                                                |
| -30~+80°C         |          |           | ✓         | ✓         | ✓                | ✓ See Table 1                                  |
| -40~+85°C         |          |           | ✓         | ✓         | ✓                |                                                |

Please note that all parameters can not necessarily be specified in the same device

Customer to specify : Frequency, Frequency Tolerance, Temperature Stability, Operating Temperature & Load Capacitance

In line with our ongoing policy of product evolution and improvement, the above specification may subject to change without notice

ISO9001 Registered

For quotations or further information please contact us at:

3 The Business Centre, Molly Millars Lane, Wokingham, Berkshire, RG41 2EY, UK

<http://www.actcrystals.com>


Issue: 12 C1F

Date: 03-12-2010


## ACT320SMX-4

Tape & Reel Dimensions (mm)

| Tolerance<br>Dimension | TAPE |       |      |      |      |  |      | REEL |       |      |      |
|------------------------|------|-------|------|------|------|--|------|------|-------|------|------|
|                        | W    | Wo    | W1   | Lo   | L1   |  | H1   | A    | B     | C    | D    |
|                        | ±0.2 | ±0.05 | ±0.1 | ±0.1 | ±0.1 |  | ±0.1 | +0/- | +1/-0 | ±1.5 | ±0.5 |
|                        | 8.0  | 3.5   | 3.5  | 2.8  | 4.0  |  | 1.0  | ##   | 60    | 9.5  | 2.0  |

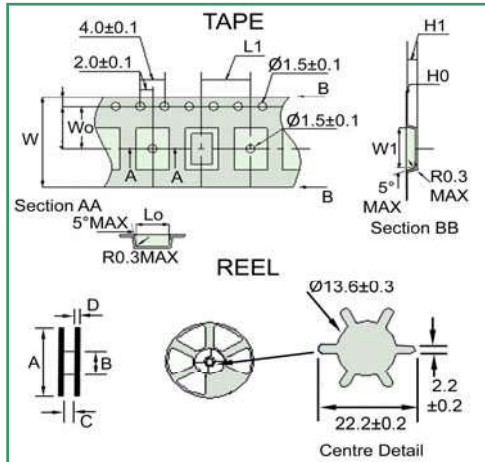

### Reflow

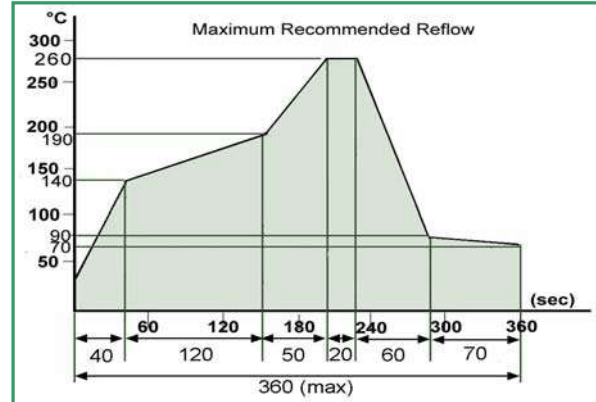

### Material Content / RoHS

Compatible with Eu Directive  
2002/EC - RoHS

|                  |           | Material content           |             |      |   |  |
|------------------|-----------|----------------------------|-------------|------|---|--|
| Ceramic          | package   | Aluminum oxide             | 1344-28-1   | 86.2 | % |  |
|                  |           | Silicon oxide              | 14808-60-7  | 4    | % |  |
|                  |           | Calcium carbonate          | 471-34-1    | 4    | % |  |
|                  |           | Magnesium carbonate        | 23399-33-5  | 5    | % |  |
|                  |           | Gold                       | 7440-57-5   | 0.32 | % |  |
| Conductive epoxy | Bonding   | Tungsten                   | 7440-33-7   | 0.18 | % |  |
|                  |           | Nickel                     | 7440-02-0   | 0.3  | % |  |
|                  |           | Silver                     | 7440-22-4   | 80   | % |  |
|                  |           | Dodecane                   | 112-40-3    | 10   | % |  |
|                  |           | Aromatic hydrocarbons      | 63231-51-6  | 10   | % |  |
| Iron Alloy       | Lid       | Cobalt                     | 7440-48-4   | 17.5 | % |  |
|                  |           | Nickel                     | 7440-02-0   | 30   | % |  |
|                  |           | Iron                       | 7439-89-6   | 52.5 | % |  |
| Silver           | Electrode | Silver                     | 7440-22-4   | 100  | % |  |
| Synthetic Quartz | Blank     | Silicon dioxide, synthetic | 112926-00-8 | 100  | % |  |

| Banned substances content: none detected (detection limits below) |                                     |                                       |                                     |                                     |                                       |
|-------------------------------------------------------------------|-------------------------------------|---------------------------------------|-------------------------------------|-------------------------------------|---------------------------------------|
| Banned substances                                                 | Product Maximum concentration (ppm) | Packaging Maximum concentration (ppm) | Banned substances                   | Product Maximum concentration (ppm) | Packaging Maximum concentration (ppm) |
| Cadmium & compounds                                               | 2                                   | 100                                   | Chlorinated Paraffin                | 5                                   | 5                                     |
| Lead & compounds                                                  | 2                                   |                                       | Other chlorinated organic compounds | 5                                   | 5                                     |
| Mercury & compounds                                               | 2                                   |                                       | Other brominated organic compounds  | 5                                   | 5                                     |
| Hexavalent Chromium                                               | 2                                   |                                       | Organic tin compounds               | 5                                   | 5                                     |
| PBB                                                               | 5                                   | 5                                     | Asbestos                            | 5                                   | 5                                     |
| PBDE                                                              | 5                                   |                                       | Azo compounds                       | 5                                   | 5                                     |
| PCB                                                               | 5                                   |                                       | Formaldehyde                        | 5                                   | 5                                     |
| PCN                                                               | 5                                   | 5                                     | PVC                                 | 5                                   | 5                                     |

In line with our ongoing policy of product evolution and improvement, the above specification may subject to change without notice

ISO9001 Registered

For quotations or further information please contact us at:

3 The Business Centre, Molly Millars Lane, Wokingham, Berkshire, RG41 2EY, UK

<http://www.actcrystals.com>

Issue: 12 C1F

Date: 03-12-2010

**SERIES : ACT320SMX-4 Part numbering code is BN**

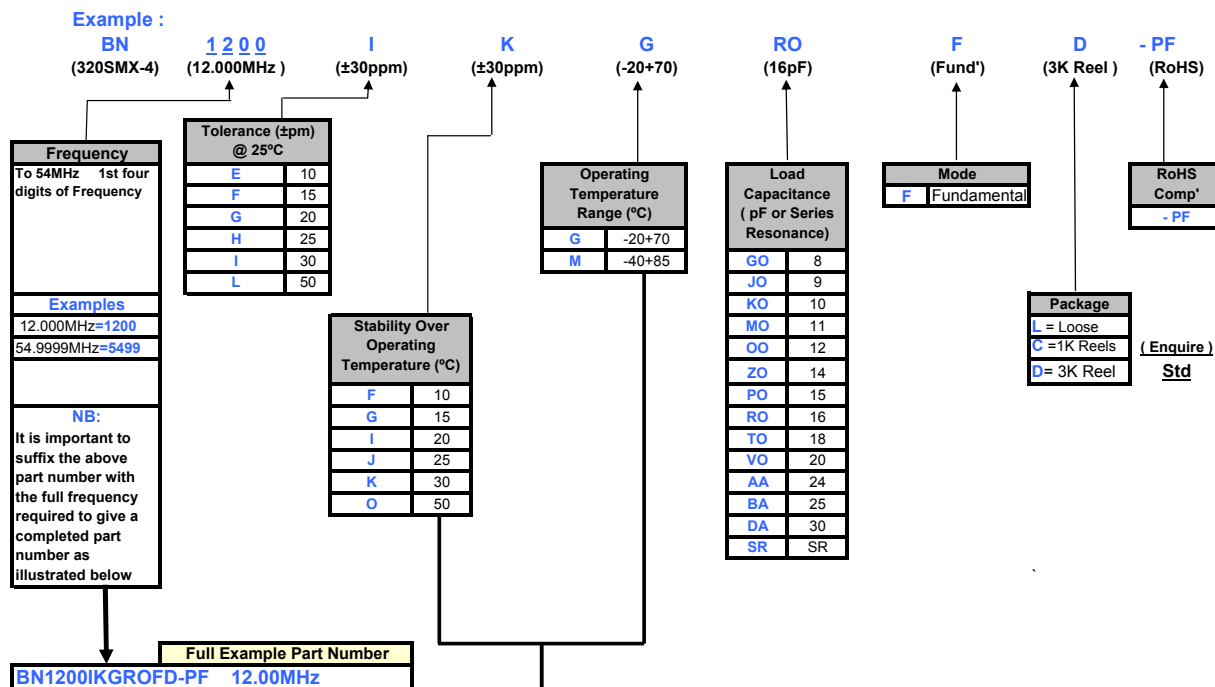


Table 1: Available stabilities:

| Stability Temp | $\pm 5$ ppm | $\pm 10$ ppm | $\pm 15$ ppm | $\pm 20$ ppm | $\pm 30$ ppm |
|----------------|-------------|--------------|--------------|--------------|--------------|
| 0~+50°C        | ✓           | ✓            | ✓            | ✓            | ✓            |
| -10~+60°C      | ✓           | ✓            | ✓            | ✓            | ✓            |
| -20~+70°C      |             | ✓            | ✓            | ✓            | ✓            |
| -20~+85°C      |             |              | ✓            | ✓            | ✓            |
| -30~+80°C      |             |              | ✓            | ✓            | ✓            |
| -40~+85°C      |             |              | ✓            | ✓            | ✓            |

- ✓ Available stabilities
- ✓ Only available for frequencies  $\geq 30$ MHz
- ✓ See Table 2

Table 2: Available stabilities for temperature range -40+85°C

| Frequency range           | Max ESR     | Min Tolerance Available | Tightest Stability v Temperature Available             |
|---------------------------|-------------|-------------------------|--------------------------------------------------------|
| 12MHz $\leq f_0 < 15$ MHz | 80 $\Omega$ | $\pm 10$ ppm            | -40~+85°C // $\pm 30$ ppm<br>-20~+70°C // $\pm 10$ ppm |
| 15MHz $\leq f_0 < 19$ MHz | 70 $\Omega$ | $\pm 10$ ppm            | -40~+85°C // $\pm 20$ ppm<br>-20~+70°C // $\pm 10$ ppm |
| 19MHz $\leq f_0 < 22$ MHz | 50 $\Omega$ | $\pm 10$ ppm            | -40~+85°C // $\pm 20$ ppm<br>-20~+70°C // $\pm 10$ ppm |
| 22MHz $\leq f_0 < 25$ MHz | 40 $\Omega$ | $\pm 10$ ppm            | -40~+85°C // $\pm 20$ ppm<br>-20~+70°C // $\pm 10$ ppm |
| 25MHz $\leq f_0 < 32$ MHz | 30 $\Omega$ | $\pm 10$ ppm            | -40~+85°C // $\pm 15$ ppm<br>-20~+70°C // $\pm 10$ ppm |
| 32MHz $\leq f_0 < 54$ MHz | 25 $\Omega$ | $\pm 10$ ppm            | -40~+85°C // $\pm 15$ ppm<br>-20~+70°C // $\pm 10$ ppm |

**NOTES :**

- 1) Tighter Tolerances and Stabilities and other Operating Temperature Ranges may be available.
- 2) ACT are always happy to consider truly custom specification parts which may require non-standard specification parameters, specific testing, customer requested AQL requirements, non standard packaging or taping and reeling and custom marking. Such devices would normally be allocated a custom specification part number which is wholly customer specific.
- 3) A guide to availability of tighter stabilities appears on page one of this data sheet in Table 2
- 4) Frequencies below 10.000MHz are prefixed with a "0" (eg: 0900 = 9MHz. Whereas 10.000MHz is 1000 )

ISO9001 Registered

For quotations or further information please contact us at:

3 The Business Centre, Molly Millars Lane, Wokingham, Berkshire, RG41 2EY, United Kingdom  
<http://www.actcrystals.com>