CUSTOMER:

DISTRIBUTOR: Rutronik

(PE48AA1)

NO.: 20110610(4)

APPROVE SHEET

[Compliance with RoHS]

PRODUCT: DC BRUSHLES	S FAN
USER P/N:	
Parts No.: <u>JF0925B1H-001-065R</u>	
Printed model number on the stick:	JF0925B1HR
(SIGNATURE)	

JAMICON GROUP
KAIMEI ELECTRONIC CORP.
TEL:0755-2813 5359
FAX:0755-2813 5384



APPROVED	CHECKED	DRAWN
研發經理 2011 M. 1 D 尤與儀	课长 2011.5.10 李波	王婷 2011/06/10

1. MECHANICAL:


1-01	Dimension	Dimension of fan shall be shown in the outline styling drawing attached.
1-02	Motor	Four-pole motor.
1-03	Frame	Plastic material UL 94V-0 (P.B.T).
1-04	Impeller	Plastic material UL 94V-0 (P.B.T).
1-05	Free drop shock	In minute package condition, the fan should withstand each one drop of three faces from 30cm distance height onto 10 mm thickness of wooden board.

2.ELECTRICAL:

2-01	Rated current	Rated current shall be measured after 30 minutes continuous rotation at rated voltage.		
2-02	Start voltage	The voltage that enable to start the fan by sudden switch on.		
2-03	Rated Speed	Rated speed shall be measured after 30 minutes continuous rotation at rated voltage.		
2-04	Input Power	Input power shall be measured after 30 minutes continuous rotation at rated voltage.		
2-05	Lock Current	Locked current shall be measured Within one minute at rotor locked, after 30 minutes continuous rotation at rated voltage in clear air.		
2-06	Insulation resistance	More than 10M ohm at 500 V.D.C between lead and housing.		
2-07	Dielectric strength	Measured 5 mA(max) trip current at 700 V.A.C for 3 sec. between lead and housing.		
2-08	Locked motor protection	Designed to meet UL, CUL and TUV.		

3.CHARACTERISTICS:

3-01	Air Flow & Static Pressure	The air flow data and static pressures should be determined in accordance with AMCA standard or DIM 24163 specification in a double- chamber testing with intake-side measurement.
3-02	Noise level	The measurement of noise level is carried out with reference to DIM 45635 in an echoic chamber with the microphone positioned 1 M from the air intake. Testing fan shall be hung in clean air.

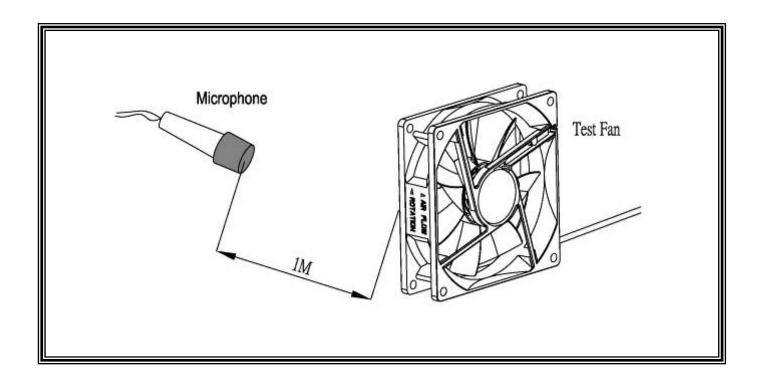

4.ENVIRONMENTAL:

4-01	Operating temperature	-10°C to 70°C (ordinary humidity)
4-02	Storage Temperature	-40°C to 70°C (ordinary humidity)
4-03	Humidity	After 96 hrs, 95% RH 40±2°C per MIL-STD-202F method 103B, Humidity test, The measured data of insulation resistance & dielectric strength should meet the specification listed in attach.
4-04	Thermal Shock	After thermal shock test per MIL-STD-202F method 107D, Condition D, The measured data of insulation resistance & dielectric strength should the specification

5.DATA-SHEET:


MODEL: JF0925B1H-001-065R

5-1. SPECIFICATION:

NO.	ITEM	SPECIFICATION	UNIT	CONDITION
5-1-01	Dimension	92*92*25	mm	
5-1-02	Bearing	Dual Ball		
5-1-03	Rated Voltage	12	VDC	
5-1-04	Operating Voltage	6.0 ~ 13.8	VDC	
5-1-05	Start Voltage	6.0	VDC	On/off test
5-1-06	Speed	2800	R.P.M	±10%,At rated Voltage
5-1-07	Input Current	0.25	Amp	At rated Voltage
5-1-08	Input Power	3.0	Watt	At rated Voltage
5-1-09	Nominal Current	0.35	Amp	At rated Voltage
5-1-10	Air Flow	52.04	CFM	At 0 static Pressure of rated speed
5-1-11	Static Pressure	0.139	inchH₂O	At 0 air flow of rated speed
5-1-12	Noise	35.1	dBA	At rated speed
5-1-13	Life Expectancy(L10)	75,000	Hours	At 40℃
5-1-14	Motor protection	Impedance protected		
5-1-15	Polarity protection	It will not damage the fan while reverse input.		
5-1-16	Auto Restart	NO		
5-1-17	Speed Signal output	NO		
5-1-18	Alarm Signal output	NO		
5-1-19	Rotation direction	From the label side		Clockwise
5-1-20	Weight	85	Gram	Per each piece
5-1-21	Safety Certificate	UL, CUL, TUV, CE		

5-2. LEAD WIRE:

NO.	ITEM	SPECIFICATION			
5-2-01	AWG NO. & Authorize	24AWG , UL1007(The end of wire with tin as drawing)			
E 2 02	Color	_	+		
5-2-02		Black	Red		
5-2-03	Line Length	255±10 mm			
5-2-04	Connector	Notes as: Not available			
5-2-05	Tube	NO			

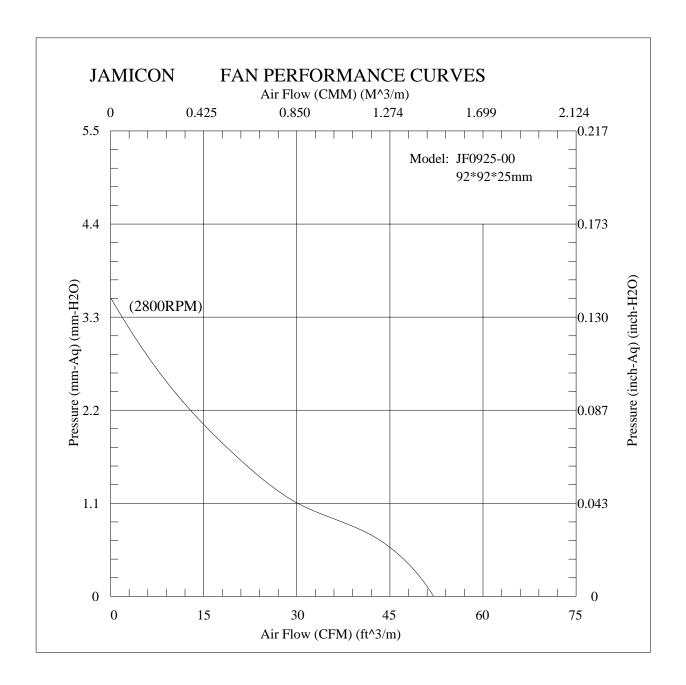

風扇振動噪音性能測試報告

(The Test Report of Fan Vibration and Noise)

O B(45)

C(45)

B-90)

風扇型號(Sample Type): JF0925-00

基本規格(Properities):

DC 12V 7葉 4極 2800RPM

測試條件(Test Conditions)

輸入電壓(Input Voltage):

12 V

量測時間(Measuring Time):

20 sec

麥克風距離(Mic. Distance):

100 cm

A(180°)

麥克風角度(Mic. Angle):

180°

頻域加權(Freq. Weighting):

時域加權(Time Weighting):

SLOW

背景噪音(Background Noise):

15.0 dB(A)

溫度(Temperature):

C

相對濕度(Relative Humidity):

測試日期(Test Date): 2005/12/28 AM 10:41:08

測試編號(Test No.): (4)

測試結果(Test Results)

電壓(Passing Voltage):

電流(Electric Current):

消耗功率(Power Dissipation):

轉速(Rotation Speed):

2803 RPM

振動量(Vibration Level) (依據 ISO 2372)

振動速度(Vib. Velocity):

1.92 mm/sec RMS

均能層壓位準(Time-averaged SPL, Leq) (依據 CNS 8753)

量測點(At Meas. Point):

35.3 dB(A)

1 米處(At 1m Point):


35.1 dB(A)


最大聲壓位準(MaxL):

35.7 dB(A)

最小聲壓位準(MinL):

34.1 dB(A)

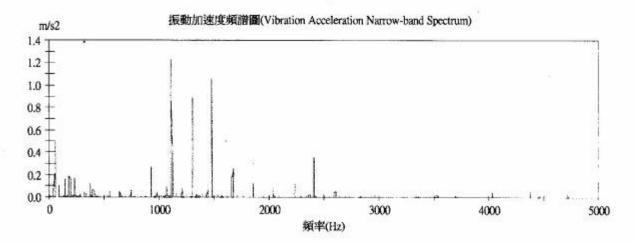

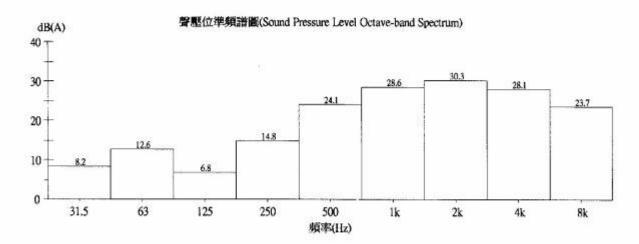


簽核人員:

操作員:

簽章:

系統開發(Developer): 工業技術研究院 機械工業研究所(MIRL/TIRI)

2005/12/28 AM 10:51:31 列印

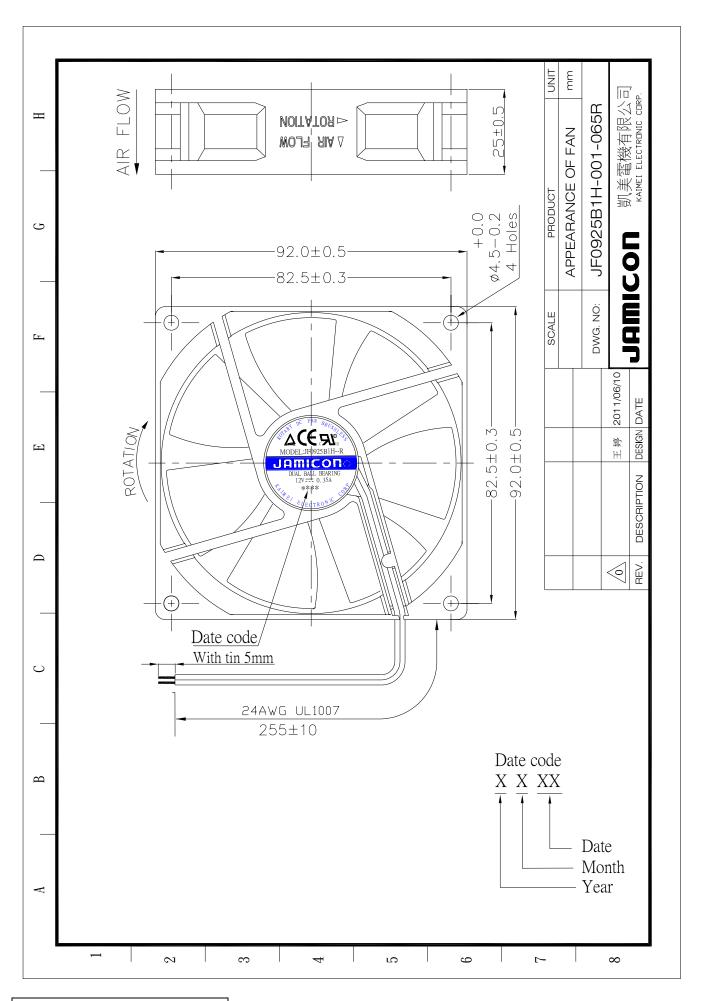

GPWV2.E156480 Fans, Electric - Component

Page Bottom

Fans, Electric - Component

See General Information for Fans, Electric - Component

KAIMEI ELECTRONIC CORP

E156480

13TH 81 HSIN-TAI-WURD, SEC 1 HSICHIH, TAIPEI HSIEN 221 TAIWAN

ACfans, Models MA0825H2Bzz, MA0825H2Szz, MA0825M2Szz, MA0825M2Szz, MA0838H2Bzz, MA083H2Szz, MA0838M2Szz, MA0925H2Bzz, MA0925H2Szz, MA0925H2Szz, MA0925H2Szz, MA0938H2Szz, MA0938H2Szz, MA0938H2Szz, MA0938H2Szz, MA0938H2Szz, MA0938H2Szz, MA0938H2Szz, MA0938H2Szz, MA1225H2Bzz, MA1225H2Bzz, MA1225H2Bzz, MA1225H2Bzz, MA1225H2Bzz, MA1225H2Bzz, MA1238H2Szz, MA1338H2Szz, MA1338H2Szz, MA1338H2Szz, MA1338H2Szz, MA1338H2Szz, MA1338H2Szz, MA1338H2Szz, MA0825H1Szz, MA0825H1Szz, MA0825H1Szz, MA0838H1Szz, MA0838H1Szz, MA0838H1Szz, MA0838H1Szz, MA0938H1Szz, MA1225H1Szz, MA1225H1Szz, MA1238H1Szz, MA1238H1Szz, MA1238H1Szz, MA1338H1Szz, MA1338H1Szz, MA1338H1Szz, MA1338H1Szz, MA1338H1Szz, MA1338H1Szz, MA1235H1Szz, MA1338H1Szz, MA1338H1Szz, MA1235H1Szz, MA1338H1Szz, MA1338H1Szz, MA1235H1Szz, MA1338H1Szz, MA1338H1Szz, MA1235H1Szz, MA1338H1Szz, MA1338M1Szz, MA226H1Bzz, MA1338H1Szz, MA1338H1Szz, MA1338H1Szz, MA1235H1Szz, MA1338H1Szz, MA1338M1Szz, MA226H1Bzz, MA1338H1Szz, MA1338H1Szz, MA1235H1Szz, MA1338H1Szz, MA1338M1Szz, MA226H1Bzz, MA1338H1Szz, MA1235H1Szz, MA1338H1Szz, MA1338M1Szz, MA226H1Bzz, MA1338H1Szz, MA226H1Bzz, MA1338H1Szz, MA226H1Bzz, MA1338H1Szz, MA226H1Bzz, MA1338H1Szz, MA226H1Bzz, MA1338H1Szz, MA226H1Bzz, MA226H

Models JA1751H1, JA1751H2, JA1238H1, JA1238H2, JA1238-1H1, JA1238-1H2, JA1225H1, JA1225H2, JA0925H1, JA0925H2, JA0838H1, JA0838H2, JA0825H1, JA0825H2,

Model KAX (A) (B) X_1 and/or X_2 , where X may be 0825, 0838, 0925, 1225, 1238 or 1751, (A) may be H1, H2, M1, M2, L1 or L2, (B) may be B or S and X_1 , X_2 may be 0 thru 9, A thru Z, blank or "-"; Model MAX (A) (B) X_1 and/or X_2 , where X may be 1238, 1538, 1738, 1751, 1755 or 2589, (A) may be H1, H2, M1 or M2, (B) may be B, S and X_1 , X_2 may be 0 thru 9, A thru Z or "-"

 $\label{eq:models JA1238(a)(c)(b)(x)(y), JA1238HD(b)(x)(y), KA1238(a)(c)(b)(x)(y), KA1238HD(b)(x)(y) series, where (a) may be H, M or L, (c) may be 1 or 2, (b) may be B or S, (x) and (y) may be blank, "-", 0 thru 9 or A thru 2.$

Models JA1751H1(b)(x)(y), JA1751H2(b)(x)(y) series, where (b) may be S or B, (x) and (y) may be blank, "-", 0 thru 9 or A thru Z.

DC fansModels JF0207, JF0307, JF0407 followed by B or S, followed by -1HX, -1LX, -1MX, -5HX, -5LM or -5MX; Model JF0210 followed by B, C or S, followed by -5LXXX; Model JF0410 followed by B, C or S, followed by -1XXX, -1MXXX, -1HXXX or -5MXXX; Model JF0413 followed by B, C, H, F or S, followed by -1MXXX; Model JF0512 followed by B, C or S, followed by -1LXXX or -1MXXX; Model JF0615 followed by B, C or S, followed by -1HXXX, -1LXXX or -1MXXX, -1EXXX, -1EXXX; Model JF0620 followed by B, C, H, F or S, followed by 1VXXX, -1EXXX, -1MXXX, -1HXXX, -2EXXX, -2LXXX, -2HXXX or -2MXXX; Model JF0625 followed by B, C, H, F or S, followed by -1VXXX, -1EXXX, -1LXXX, -1MXXX, -1HXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; Model JF0825 followed by B, C, H, F or S, followed by -1EXXX, -1HXXX, -1HXXX, -1HXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; where "X" may be 0 thru 9, A thru Z, "-" or blank; Model JF0925 followed by B, C, H, F or S, followed by 1EXXX, -1LXXX, -1MXXX, -1HXXX, -2EXXX, -2MXXX or -2HXXX; Model JF0925 followed by B, C, H, F or S, followed by -1EXXX, -1LXXX, -1MXXX, -1HXXX, -2EXXX, -2MXXX, -2HXXX; Model JF0925 followed by B, C, H, F or S, followed by -1EXXX, -1LXXX, -1MXXX, -1HXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; Model JF0925 followed by B, C, H, F or S, followed by -1EXXX, -1LXXX, -1MXXX, -1HXXX, -2EXXX, -2LXXX, -2MXXX, or -2HXXX; Model JF0925 followed by B, C, H, F or S, followed by -1EXXX -1LXXX, -1MXXX, -1HXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; Model JF0925 followed by B, C, H, F or S, followed by -1EXXX, -1LXXX, -1MXXX, -1HXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; Model JF0925 followed by B, C, H, F or S, followed by -1EXXX, -1LXXX, -1MXXX, -1MXXX, -1HXXX, -2EXXX, -2MXXX, -2MXXX or -2HXXX; Model JF0925 followed by B, C, H, F or S, followed by -1EXXX, -1LXXX, -1MXXX, -1MXXX, -1MXXX, -2EXXX, -2MXXX, -2MXXX, or -2HXXX; Model JF0925 followed by B, C, H, F or S, followed by -1EXXX, -1MXXX, -1MXXX, -1MXXX, -1MXXX, -2EXXX, -2MXXX, -2MXXX, or -2HXXX; Model JF0925 followed by B, C, H, F or S, followed by -1EXXX, -1MXXX, -1MXXX, -

Model JFD615(X)2(Y)XXX, where (X) may be S, B or C and (Y) may be H, M, L, E or V.

Models JF0210(X)1H(Y), JF0210(X)1M(Y), JF0210(X)5H(Y), JF0210(X)5L(Y), JF0210(X)5M(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or blank.

Models JF0310(X)1H(Y), JF0310(X)1L(Y), JF0310(X)1M(Y), JF0310(X)5H(Y), JF0310(X)5L(Y), JF0310(X)5M(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or blank.

Models JF0A08(X)5H(Y), JF0A08(X)5L(Y), JF0A08(X)5M(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or

blank.

Models JF0B10(X)1H(Y), JF0B10(X)1L(Y), JF0B10(X)1M(Y), JF0B10(X)5H(Y), JF0B10(X)5L(Y), JF0B10(X)5M(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or blank.

Model JF1751(X)4S(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or blank.

Models KF021055L, KF021055M, KF021055H, KF021085L, KF021085M, KF021085M, KF021085LD, KF021085DD, KF021085DD, KF031085DD, KF0410S5L, KF0410S5L, KF031081D, KF021081DD, KF021081DD, KF031081DD, KF031081DD, KF031081DD, KF031081DD, KF031081DD, KF031081DD, KF031081DD, KF031081DD, KF0410S1L, KF0410S1D, KF0410S1D, KF0410B1DD, KF0410B1DD,

Model KF0xyz, where x may be 420, 515 or 610, y may be B1, B2, B5, S1, S2 or S5 and z may be H, HC, HD, HS, L, LC, LD, LS, M, MC, MD or MS; Model KF123xyz, where x may be Z or 8, y may be B1, B2, B5, S1, S2 or S4 and z may be H, HA, L, LA, M or MA; Model MF0xyz where x may be 410 or 510, y may be B1, B5, S1 or S5 and z may be H, HC, HD, HS, L, LC, LD, LS, M, MC, MD or MS.

Models KF0210S5L, KF0210S5M, KF0210S5H, KF0210B5L, KF0210B5M, KF0210B5H, KF0210C5L, KF0210C5M, KF0210C5M, KF0210C5H, KF0210S1L, KF0210S1M, KF0210S1H, KF0210B1H, KF0210B1H, KF0210C1L, KF0210C1M, KF0210C1H, KF0210C1H, KF0210S5M, KF0310S5M, KF0310S5M, KF0310B5H, KF0310B5H, KF0310C5L, KF0310C5M, KF0310C5H, KF0310S1M, KF0310S1M, KF0310S1H, KF0310B1M, KF0310B1H, KF0310C1L, KF0310C1M, KF0310C1H, KF0410S1L, KF0410S1H, KF0410B1H, KF0410B1H, KF0410C1L, KF0410C1M, KF0410C1H, KF0410S5L, KF0410S5M, KF0410S5M, KF0410B5M, KF0410B5M, KF0410B5H, KF0410C5L, KF0410C5M, KF0410C5H, KF0510S1L, KF0510S1M, KF0510S1H, KF0510B1H, KF0510B1H, KF0510C1L, KF0510C1M, KF0510C1H. All models may have optional suffix "x4x5x6", where "x4", "x5" and "x6" may be A thru Z, 0 thru 9, "-" or blank.

Models KF0306S1M, KF0306S1H, KF0306C1H, KF0306C1S, KF0306S5M, KF0306S5H, KF0306C5M, KF0306C5H, KF0409S1L, KF0409S1M, KF0409S1H, KF0409S1H, KF0409S1H, KF0409S1H, KF0409S1H, KF0409S5H, KF0409S5H, KF0409S5H, KF0409S5H, KF0409S5H, KF0409S5H, KF0409S5H, KF0409S5H, KF0409S5H, KF0509S5H, KF05

Models KF0510SSL, KF0510S5M, KF0510S5H, KF0510C5L, KF0510C5M, KF0510C5H, KF0510BSL, KF0510BSM, KF0510BSH, KF0515SSH, KF0515SSM, KF0515SSSL, KF0515C5L, KF0515C5M, KF0515C5H, KF0515BSL, KF0515BSM, KF0515BSH, KF0509B1H, KF0509B1H, KF0509B1H, KF0509B1H, KF0509B1H, KF0509C1H, KF0509C1H, KF0509C1H, KF0515S1L, KF0515S1H, KF0515S1H, KF0515S1H, KF0515S1H, KF0515B1H, KF0515B1H, KF0625S1L, KF0625S1H, KF0625S1H, KF0625S1H, KF0625S1H, KF0625S1H, KF0625B1H, KF0625B1H, KF0510FSH, KF0510FSH, KF0510FSH, KF0510FSH, KF0510FSH, KF0510HSH, KF0

Models KF0407C1H, KF0407S1H, KF0407C1M, KF0407S1M, KF0407C5H, KF0407S5H, KF0407C5M, KF0407S5M, KF0C07C1H, KF0C07C1H, KF0C07C1M, KF0C07C1M, KF0C07C1M, KF0C07C5H, KF0C07C5M, KF0C07S5M, KF0420B1L, KF0420B1L, KF0420B1M, KF0420B1H, KF0420B1H, KF0420B1H, KF0420B5H, KF0420B5M, KF0420S5M, KF0420B5H, KF0420B5H, KF0420B5H, KF0610B1H, KF0610B1H, KF0610B1H, KF0610B1L, KF0610B1L, KF0610B1L, KF0420C1L, KF0610B1L, KF0420C1L, KF0420H1L, KF0420F1H, KF0610H1H, KF0610H1H, KF0610H1H, KF0610H1L, KF0610F1H, KF0610F1H, KF0610F1L. All models may have optional suffix "x4x5x6", where "x4", "x5" and "x6" may be A thru Z, 0 thru 9, "-" or blank.

Models JF0515(A1)1(B)XXX, JF0515(A1)2(B)XXX, JF0615(A)5(C)XXX, JF0615(A)1(D)XXX, JF0615(A)2(D)XXX, JF0620(A)1(D)XXX, JF0620(A)2(D)XXX, JF0625(A1)1(E)XXX, JF0625(A1)2(E)XXX, JF0625(A1)1(D)XXX, JF0925(A1)2(E)XXX, JF0925(A1)1(D)XXX, JF0925(A1)1

Models KF0420(A)2(B)(C), KF1225(A)1(D)(C), where (A) may be B, S, C, F or H, (B) may be L, M, H or S, (D) may be V, E, L, M or H and (C) may be XXX, where X may be 0 thru S, A thru Z, Y-Y or blank.

Models LF0825(a)1(c)($\beta(g)(h)(i)(j)$, LF0925(b)1(c)($\beta(g)(h)(i)(j)$, LF1225(b)1(e)($\beta(g)(h)(i)(j)$) series, where (a) may be 3, B or C, (b) may be 3 or B, (c) may be 5, H. M, L or E, (d) may be H. M, L e or V, (f) may be "-" or 0 thru 9 or A thru Z, (g) may be blank, "-" or 0 thru 9 or A thru Z, (j) may be blank, "-" or 0 thru 9 or A thru Z.

Models kF0B10(b)5(r1)(xy)(z), kF0B10(b)1(r1)(xy)(z), kF0410(b)2(r6)(xy)(z), kF0510(b)2(r2)(xy)(z), kF0610(b)5(r3)(xy)(z), kF0615(b)5(r3)(xy)(z), kF0615(b)1(r4)(xy)(z), kF0615(b)2(r4)(xy)(z), kF0820(b)1(r5)(xy)(z), kF0620(b)2(r5)(xy)(z), kF0715(b)15(xy)(z), kF0820(b)2(r1)(xy)(z), kF0820(b)2(r1)(xy)(z), kF1225(b)2(r2)(xy)(z), kF0815(b)1(r8)(xy)(z), kF0815(b)1(r1)(xy)(z), kF0815(b)2(r1)(xy)(z), kF1238(b)2(r1)(xy)(z), kF1238(b)2(r2)(xy)(z), kF10320(b)2(r2)(xy)(z), kF10320(b thru Z or 0 thru 9.

A thru Z or 0 thru 9

 $\label{eq:models JB055101(u)(w)(x)(y)(z), JB055105(v)(w)(x)(y)(z) series, where (u) may be H, M or L, (v) may be M or L, (w) may be B, S, C, H or F, (x), (y) and (z) may be A through Z, 0 through 9, blank, or <math>\frac{d^2 u}{dx^2}$.

model designation.

Marking: Company name, "EL56480", trademark JAMICON or URMICON®

Last Updated on 2010-01-26

Notice of Disclaimer. Questions?

Page Top

Copyright 72010 Underwriters Laboratories Inc. ®

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Us Service, Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Designs and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "Copyright © 2010 Underwriters Laboratories Inc. ⊚"

An independent organization working for a safer world with integrity, precision and knowledge



GPWV8.E156480 Fans, Electric Certified for Canada - Component

Page Bottom

Fans, Electric Certified for Canada - Component

See General Information for Fans, Electric Certified for Canada - Component

KAIMEL ELECTRONIC CORP.

F156480

13TH 81 HSIN-TAI-WURD, SEC 1 HSICHIH, TAIPEI HSIEN 221 TAIWAN

AC fans, Models MA0825H2Bzz, MA0825H2Szz, MA0825M2Bzz, MA0825M2Szz, MA0838H2Bzz, MA083H2Szz, MA0838M2Bzz, MA0925H2Bzz, MA0925H2Szz, MA0925H2Szz, MA0925M2Szz, MA0938H2Bzz, MA0938H2Szz, MA0938H2Szz, MA0938H2Szz, MA0938H2Szz, MA0938H2Szz, MA0938H2Szz, MA0938H2Szz, MA1225H2Bzz, MA1225H2Szz, MA1225H2Bzz, MA1225H2Bzz, MA1225H2Bzz, MA1225H2Bzz, MA1225H2Bzz, MA1238H2Bzz, MA1338H2Bzz, MA1338H2Bzz, MA1338H2Bzz, MA1338H2Bzz, MA1338H2Bzz, MA1338H2Bzz, MA0825H1Bzz, MA0825H1Bzz, MA0825M1Bzz, MA0825M1Bzz, MA0838M1Bzz, MA0838M1Bzz, MA0925H1Bzz, MA0925H1Bzz, MA0925M1Bzz, MA0925M1Bzz, MA0925M1Bzz, MA0938M1Szz, MA0938M1Bzz, MA0938M1Szz, MA0938M1Szz, MA0938M1Szz, MA0938M1Szz, MA0938M1Szz, MA0938M1Szz, MA1225H1Bzz, MA1225H1Bzz, MA1225M1Bzz, MA1238M1Bzz, MA1338M1Bzz, MA1

Models JA1751H1, JA1751H2, JA1238H1, JA1238H2, JA1238-1H1, JA1238-1H2, JA1225H1, JA1225H2, JA0925H1, JA0925H2, JA0838H1, JA0838H2, JA0825H1, JA0825H2.

Model KAX (A) (B) X_1 and/or X_2 , where X may be 0825, 0838, 0925, 1225, 1238 or 1751, (A) may be H1, H2, M1, M2, L1 or L2, (B) may be B or S and X_1 , X_2 may be 0 thru 9, A thru Z, blank or "-"; Model MAX (A) (B) X_1 and/or X_2 , where X may be 1238, 1538, 1738, 1751, 1755 or 2589, (A) may be H1, H2, M1 or M2, (B) may be B, S and X_1 , X_2 may be 0 thru 9, A thru Z or "-"

Models JA1238(a)(c)(b)(x)(y), JA1238HD(b)(x)(y), KA1238(a)(c)(b)(x)(y), KA1238HD(b)(x)(y) series, where (a) may be H, M or L, (c) may be 1 or 2, (b) may be B or S, (x) and (y) may be blank, "-", 0 thru 9 or A thru Z.

 $\begin{tabular}{ll} Models JA1225H1(b)(x)(y), JA1225L1(b)(x)(y), JA0925H1(b)(x)(y), JA0838H1(b)(x)(y), JA0825H1(b)(x)(y), JA1225H2(b)(x)(y), JA0825H2(b)(x)(y), JA0825H2(b)(x)(x)(y), JA0825H2(b)(x)(x)(y), JA0825H2(b)(x)(x)(x), JA0825H2(b)(x)(x)(x), JA0825H2(b)(x)(x)(x), JA0825H2(b)(x)(x)(x), JA0825H2(b)(x)(x)(x), JA0825H2(b)(x)(x)(x)(x), JA0825H2(b)(x)(x)(x)(x), JA0825H2(b)(x)(x)(x)(x), JA0825H2(b)(x)(x)(x)(x), JA0825H2(b)(x)(x)(x), JA0825H2(b)(x)(x)(x), JA0825H2(b)(x)(x)(x), JA0825H2(b)(x)(x)(x), JA0825H2(b)(x)(x)(x), JA0825H2(b)(x)(x)(x), JA0825H2(b)(x)(x)(x), JA0825H2(b)(x)(x)(x), JA0825H2(b)(x)(x)(x), JA0825H2(b)(x)(x)(x)(x), JA0825H2(b)(x)(x)(x)(x), JA0825H2(b)(x)(x)(x)(x), JA0825H2(b)(x)(x)(x)(x), JA0825H2(b)(x)(x)(x)(x)(x)(x)(x)(x), JA0825H2(b)(x)(x)(x)(x)(x)(x)(x), JA0825H2(b)(x)(x)(x)(x)(x)(x)(x)(x)(x)(x)(x)$

Models JA1751H1(b)(x)(y), JA1751H2(b)(x)(y) series, where (b) may be S or B, (x) and (y) may be blank, "-", 0 thru 9 or A thru Z.

DC fansModels JF0207, JF0307, JF0407 followed by B or S, followed by -1HX, -1LX, -1MX, -5HX, -5LM or -5MX; Model JF0210 followed by B, C or S, followed by -1XXX, -1MXXX, -1HXXX or -5MXXX; Model JF0413 followed by B, C or S, followed by -1MXXX or -1HXXX; Model JF0512 followed by B, C or S, followed by -1LXXX or -1MXXX, -1EXXX, -1EXXX, -1EXXX, -1LXXX or -1MXXX, -1EXXX, -1VXXX; Model JF0620 followed by B, C or S, followed by 1VXXX, -1EXXX, 1LXXX, -1MXXX, -1HXXX, -2VXXX, -2EXXX, -2LXXX, -2MXXX; Model JF0625 followed by B, C or S, followed by -1VXXX, -1EXXX, -1LXXX, -1MXXX, -1HXXX, -1HXXX, -2VXXX, -2EXXX, -2MXXX or -2HXXX; Model JF0625 followed by B, C or S, followed by -1VXXX, -1EXXX, -1LXXX, -1HXXX, -1HXXX, -1HXXX, -2VXXX, -2MXXX or -2HXXX; Model JF0925 followed by B, C, H, F or S, followed by 1EXXX, -1LXXX, -1MXXX, -1HXXX, -2EXXX, -2MXXX or -2HXXX; Model JF0925 followed by B, C, H, F or S, followed by 1EXXX, -1LXXX, -1MXXX, -1HXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; Model JF0925 followed by B, C, H, F or S, followed by -1EXXX, -1LXXX, -1MXXX, -1HXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; Model JF1225 followed by B, C, H, F or S, followed by -1EXXX, -1LXXX, -1MXXX, -1HXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; Model JF1225 followed by B, C, H, F or S, followed by -1EXXX, -1LXXX, -1MXXX, -1HXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; Model JF1225 followed by B, C, H, F or S, followed by -1EXXX, -1MXXX, -1MXXX, -1MXXX, -2EXXX, -2MXXX or -2HXXX; Model JF1225 followed by B, C, H, F or S, followed by -1EXXX, -1MXXX, -1MXXX, -1MXXX, -1MXXX, -2EXXX, -2MXXX or -2HXXX; Model JF1225 followed by B, C, H, F or S, followed by -1EXXX, -1MXXX, -1MXXX, -1MXXX, -1MXXX, -2EXXX, -2MXXX or -2HXXX; Model JF10410S1.

Model JF0615(X)2(Y)XXX, where (X) may be S, B or C and (Y) may be H, M, L, E or V.

Models JF0210(X)1H(Y), JF0210(X)1M(Y), JF0210(X)5H(Y), JF0210(X)5L(Y), JF0210(X)5M(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or blank.

Models JF0310(X)1H(Y), JF0310(X)1L(Y), JF0310(X)1M(Y), JF0310(X)5H(Y), JF0310(X)5L(Y), JF0310(X)5M(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or blank.

Models JFDA08(X)5H(Y), JF0A08(X)5L(Y), JF0A08(X)5M(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or

blank.

Models JF0B10(X)1H(Y), JF0B10(X)1L(Y), JF0B10(X)1M(Y), JF0B10(X)5H(Y), JF0B10(X)5L(Y), JF0B10(X)5M(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or blank.

Model JF1751(X)4S(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or blank.

Models KF0210S5L, KF0210S5M, KF0210S5H, KF0210B5L, KF0210B5M, KF0210B5M, KF0210B5LD, KF0210B5D, KF0210B5D, KF0310S5LD, KF0310S5D, KF0310S5M, KF0310B5LD, KF0310B5D, KF0310B5D, KF0310B5D, KF0310B5D, KF0310B5D, KF0310B5D, KF0310B5D, KF0310B5D, KF0310B1D, KF0410B1D, KF0409B1H, KF0510B1D, KF0510B1D, KF0510B1D, KF0510B1D, KF0510B1H, K

Model KF0xyz, where x may be 420, 515 or 610, y may be B1, B2, B5, S1, S2 or S5 and z may be H, HC, HD, HS, L, LC, LD, LS, M, MC, MD or MS; Model KF123xyz, where x may be 2 or 8, y may be B1, B2, B5, S1, S2 or S4 and z may be H, HA, L, LA, M or MA; Model MF0xyz where x may be 410 or 510, y may be B1, B5, S1 or S5 and z may be H, HC, HD, HS, L, LC, LD, LS, M, MC, MD or MS.

Models KF0210S5L, KF0210S5M, KF0210S5H, KF0210B5L, KF0210B5M, KF0210B5M, KF0210C5L, KF0210C5M, KF0210C5M, KF0210C5H, KF0210S1L, KF0210S1M, KF0210S1H, KF0210S1H, KF0210B1H, KF0210B1H, KF0210C1L, KF0210C1M, KF0210C1H, KF0210C1H, KF0210S5M, KF0310S5M, KF0310S5M, KF0310S5H, KF0310B5M, KF0310B5H, KF0310C5L, KF0310C5M, KF0310C5H, KF0310S1L, KF0310S1M, KF0310S1H, KF0310B1M, KF0310B1H, KF0310C1L, KF0310C1M, KF0310C1H, KF0410S1L, KF0410S1H, KF0410B1H, KF0410B1H, KF0410C1L, KF0410C1M, KF0410C1H, KF0410S5L, KF0410S5M, KF0410S5M, KF0410B5M, KF0410B5M, KF0410B5M, KF0410C5L, KF0410C5M, KF0410C5M, KF0410C5H, KF0510S1L, KF0510S1H, KF0510S1H, KF0510C1H, KF05

Models KF0510S5L, KF0510S5M, KF0510S5H, KF0510CSL, KF0510CSM, KF0510C5H, KF0510BSL, KF0510BSM, KF0510B5H, KF0515S5H, KF0515S5M, KF0515S5SH, KF0515SSSH, KF0509C1H, KF0509C1H, KF0509C1H, KF0509C1H, KF0509C1H, KF0515SSSH, KF0515SSSH, KF0515SSSH, KF0515SSSH, KF0515SSSH, KF0515SSSH, KF0515SSSH, KF0515SSSH, KF062SSSSH, KF062SSSSH, KF062SSSSH, KF062SSSSH, KF062SSSSH, KF062SSSSH, KF062SSSSH, KF062SSSSH, KF062SSSSH, KF062SSSH, KF0510FSH, KF0510FS

Models KF0407C1H, KF0407S1H, KF0407C1M, KF0407S1M, KF0407C5H, KF0407S5H, KF0407C5M, KF0407S5M, KF0C07C1H, KF0C07S1H, KF0C07C1H, KF0C07C1H, KF0C07C5H, KF0C07C5H, KF0C07C5M, KF0C07S5M, KF0420B1L, KF0420S1L, KF0420B1M, KF0420S1H, KF0420B1H, KF0420B5H, KF0420B5M, KF0420S5M, KF0420B5H, KF0420S5H, KF0420S5H, KF0610S1H, KF0610C1H, KF0610B1H, KF0610C1H, KF0610B1H, KF0610S1L, KF0610S1L, KF0610S1L, KF0420C1L, KF0420F1L, KF0420F1L, KF0420C1M, KF0420F1M, KF0420F1M, KF0420C1H, KF0420H1H, KF0420F1H, KF0420C5L, KF0420H5L, KF0420C5M, KF0420H5M, KF0420F5M, KF0420C5H, KF0420H5H, KF0420F5H, KF0610H1H, KF0610H1M, KF0610H1L, KF0610F1H, KF0610F1H, KF0610F1L. All models may have optional suffix "x4x5x6", where "x4", "x5" and "x6" may be A thru Z, 0 thru 9, "-" or blank.

Models JF0515(A1)1(B)XXX, JF0515(A1)2(B)XXX, JF0615(A)S(C)XXX, JF0615(A)1(D)XXX, JF0615(A)2(D)XXX, JF0620(A)1(D)XXX, JF0620(A)2(D)XXX, JF0625(A1)1(E)XXX, JF0625(A1)2(E)XXX, JF0625(A1)4(F)XXX, JF0825(A1)1(D)XXX, JF0825(A1)2(E)XXX, JF0825(A1)4(G)XXX, JF0925(A1)1(D)XXX, JF0925(A1)2(D)XXX, JF0925(A1)4(I)XXX, JF1225(A1)1(D)XXX, JF1225(A1)2 (D)XXX, JF1225(A1)4(F)XXX, where (A) may be B, C or S, (B) may be H, M, L or E, (C) may be H, M, L, E or V, (D) may be U or S, (E) may be T, U or S, (F) may be U, S, H, M, L or E, (G) may be U, S, H, M or L, (H) may be S, H, M or L, (I) may be S, H, M, L or E and "X" may be 0 thru 9, A thru Z, blank or "-", (A1) may be B, C, S, H or F.

Models KF0420(A)2(B)(C), KF1225(A)1(D)(C), where (A) may be B, S, C, F or H, (B) may be L, M, H or S, (D) may be V, E, L, M or H and (C) may be XXX, where X may be 0 thru 9, A thru Z, "-* or blank.

Models LF0825(a)1(c)(f)(g)(h)(i)(j), LF0925(b)1(d)(f)(g)(h)(i)(j), LF1225(b)1(e)(f)(g)(h)(i)(j) series, where (a) may be S, B or C, (b) may be S or B, (c) may be S, H. M, L or E, (d) may be H. M, L or E, (e) may be H. M, L, E or V, (f) may be "-" or 0 thru 9 or A thru Z, (g) may be 0 thru 4, (h) may be "-" or 0 thru 9 or A thru Z, (i) may be blank, "-" or 0 thru 9 or A thru Z.

Models KF0B10(b)5(r1)(xy)(z), KF0B10(b)1(r1)(xy)(z), KF0410(b)2(r6)(xy)(z), KF0510(b)2(r2)(xy)(z), KF0510(b)5(r3)(xy)(z), KF0615(b)1(r4)(xy)(z), KF0615(b)2(r4)(xy)(z), KF0620(b)1(r5)(xy)(z), KF0620(b)2(r5)(xy)(z), KF0615(b)15(xy)(z), KF0615(b)15(xy)(z), KF0615(b)16(xy)(z), KF0615(b)16

Models JF1238(b)1 (w)(x)(y)(z), JF1238(b) Z(w)(x)(y)(z), JF1238(b)4(w)(x)(y)(z), JF1425(b)1(v)(x)(y)(z), JF1425(b)2(v)(x)(y) (z) series, where (b) may be S, B, H or F, (w) may be T or U, (v) may be U, S, H, M, L or E, (x), (y) and (z) may be blank, '-', A thru Z or 0 thru 9.

Models JB055101(u)(w)(x)(y)(z), JB055105(v)(w)(x)(y)(z) series, where (u) may be H, M or L, (v) may be M or L, (w) may be B, S, C, H or F, (x), (y) and (z) may be A through Z, 0 through 9, blank, or "-".

Marking: Company name, model designation and Recognized Component Mark for Canada, **C** Last Updated on 2010-01-26



Questions?

Notice of Disclaimer

Page Top

Copyright 72010 Underwriters Laboratories Inc.®

The appearance of a company's name or product in this distabase does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

LL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Designs and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "Copyright © 2010 Underwriters Laboratories Inc.®"

An independent organization working for a safer world with integrity, precision and knowledge.



TÜV Rheinland Berlin Brandenburg Group



Appendix to TÜV type approved Certificate No.: R 9552030

Kind of equipment: Component DC Fan

Report number : 09562037 006

N.(0) 2 (2) 1	Trace Maligar		togical Artiflipings
JF0825S1HXXX	12Vdc, 0.19A	JF0825S2HXXX	24Vdc, 0.15A
JF0825B1HXXX	12Vdc, 0.19A	JF0825B2HXXX	24Vdc, 0.15A
JF0825C1HXXX	12Vdc, 0.19A	JF0825C2HXXX	24Vdc, 0.15A
JF0825S1MXXX	12Vdc, 0.15A	JF0825S2MXXX	24Vdc, 0.13A
JF0825B1MXXX	12Vdc, 0.15A	JF0825B2MXXX	24Vdc, 0.13A
JF0825C1MXXX	12Vdc, 0.15A	JF0825C2MXXX	24Vdc, 0.13A
JF0825S1LXXX	12Vdc, 0.10A	JF0825S2LXXX	24Vdc, 0.10A
JF0825B1LXXX	12Vdc, 0.10A	JF0825B2LXXX	24Vdc, 0.10A
JF0825C1LXXX	12Vdc, 0.10A	JF0825C2LXXX	24Vdc, 0.10A
JF0825S1EXXX	12Vdc, 0.06A	JF0825S2EXXX	24Vdc, 0.05A
JF0825B1EXXX	12Vdc, 0.06A	JF0825B2EXXX	24Vdc, 0.05A
JF0825C1EXXX	12Vdc, 0.06A	JF0825C2EXXX	24Vdc, 0.05A
JF0925S1HXXX	12Vdc, 0.35A	JF0925S2HXXX	24Vdc, 0.19A
JF0925B1HXXX	12Vdc, 0.35A	JF0925B2HXXX	24Vdc, 0.19A
JF0925C1HXXX	12Vdc, 0.35A	JF0925C2HXXX	24Vdc, 0.19A
JF0925S1MXXX	12Vdc, 0.20A	JF0925S2MXXX	24Vdc, 0.15A
JF0925B1MXXX	12Vdc, 0.20A	JF0925B2MXXX	24Vdc, 0.15A
JF0925C1MXXX	12Vdc, 0.20A	JF0925C2MXXX	24Vdc, 0.15A
JF0925S1LXXX	12Vdc, 0.16A	JF0925S2LXXX	24Vdc, 0.13A
JF0925B1LXXX	12Vdc, 0.16A	JF0925B2LXXX	24Vdc, 0.13A
JF0925C1LXXX	12Vdc, 0.16A	JF0925C2LXXX	24Vdc, 0.13A
JF0925S1EXXX	12Vdc, 0.10A	JF0925S2EXXX	24Vdc, 0.07A
JF0925B1EXXX	12Vdc, 0.10A	JF0925B2EXXX	24Vdc, 0.07A
JF0925C1EXXX	12Vdc, 0.10A	JF0925C2EXXX	24Vdc, 0.07A
JF1225S1HXXX	12Vdc, 0.30A	JF1225S2HXXX	24Vdc, 0.25A

Page 1 of 2



Zertifikat

Certificate



Zertifikat Nr. Certificate No. R 09552030

Blatt Page 0018

lhr Zeichen Client Reference

Unser Zeichen Our Reference

Ausstellungsdatum

Date of Issue (day/mo/yr)

KL230506/DTI

ZTW1-LYA- 09562037 010

27.06.2006

Genehmigungsinhaber License Holder Kaimei Electronic Corp.

13th Fl., No. 81 Sec. 1, Hsin-Tai-Wu Rd. Hsichih, Taipei Hsien 221 Fertigungsstätte Manufacturing Plant Kaimei Electronic (HK), Ltd. 10th Industry Area 2nd Road, Donghuan, Long Hua Shenzhen City, Guangdong P.R. China

Prüfzeichen Test Mark

GEPRÜFT

TYPE APPROVED Geprüft nach Tested acc. to EN 60950-1:2001+A11

Zertifiziertes Produkt (Geräteidentifikation) Certified Product (Product Identification) Lizenzentgelte - Einheit License Fee - Unit

Ventilator (Component DC Fan)

wie Blatt (as page) 01

Änderung für Bezeichnung

1) JF0625X1X2X3XXX

(Change for Type Designation)2) JF0825X1X2X3XXX

3) JF0925X1X2X3XXX

4) JF1225X1X2X3XXX

Bezeichnung (Type Designation) : 1) JF0625X1X2X3XXX(JAMICON)

2) JF0825X1X2X3XXX (JAMICON) JF0925X1X2X3XXX (JAMICON)

4) JF1225X1X2X3XXX(JAMICON)

X1 kann sein(can be)

: B, S, C, H oder(or) F

X2 kann sein(can be)

: 1 oder(or) 2

X3 kann sein(can be)

: 1) H, M, L, E oder(or) V

2), 3), 4) H, M, L oder(or) E

X kann sein(can be)

: 0-9, A-Z, - oder(or) freibleibend (blank)

Hinweis : Dieses Ausweisblatt ersetzt R 9552030, Blatt 018 vom 22.06.2006. (Remarks: This license sheet replaces

R 9552030, sheet 018 dated 22.06.2006)

Rheinla Sylamoge,

ANLAGE (Appendix): 1.6

Dem Zertifikat liegt unsere Prüf- und Zertifizierungsordnung zugrunde.

Das Produkt entspricht den o.g. Anforderungen, die Herstellung wird überwacht.

This certificate is based on our Testing and Certification Regulation. The product fulfills above-mentioned-requirements, the production is subject to surveillance.

TÜV Rheinland Product Safety GmbH, Am Grauen Stein, D-51105 Köln

Tel.:(+49/221)8 06 - 13 71 Fax:(+49/221)8 06 - 39 35 e-mail: Althoff@de.tuv.com

Zertifizierungsstelle



Certificate No: EC2D2008-03

CERTIFICATE

EQUIPMENT: DC FAN

MODEL NO.: JFX1X2X3X4X5X6X7X8, KFX1X2X3X4X5X6X7X8

APPLICANT : Kaimei Electronic Corp.

13th Fl., No. 81, Sec. 1, Hsin Tai Wu Road, Hsichih, Taipei,

Taiwan, R.O.C.





CERTIFY THAT

THE MEASUREMENTS SHOWN IN THIS TEST REPORT WERE MADE IN ACCORDANCE WITH THE PROCEDURES GIVEN IN EUROPEAN COUNCIL DIRECTIVE 2004/108/EC. THE EQUIPMENT WAS PASSED THE TEST PERFORMED ACCORDING TO European Standard EN 55022:2006 Class B, EN 61000-3-2:2006, EN 61000-3-3:1995/A1:2001/A2:2005 and EN 55024:1998/A1:2001/A2:2003 (IEC 61000-4-2:1995/A2:2000, IEC 61000-4-3:2006, IEC 61000-4-4:2004,IEC 61000-4-5:2005, IEC 61000-4-6:2006, IEC 61000-4-8:1993/A1:2000, IEC 61000-4-11:2004). THE TEST WAS CARRIED OUT ON May 28, 2008 AT SPORTON INTERNATIONAL INC. LAB.

Castries Huand

Supervisor

SPORTON INTERNATIONAL INC. 6F, No.106, Sec.1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien , Taiwan, R.O.C.

Certificate No: EC2D2008-03

ACCORDING TO European Standard EN 55022:2006 Class B, EN 61000-3-2:2006, EN 61000-3-3:1995/A1:2001/A2:2005 and EN 55024:1998/A1:2001/A2:2003 (IEC 61000-4-2:1995/A2:2000, IEC 61000-4-3:2006, IEC 61000-4-4:2004, IEC 61000-4-5:2005, IEC 61000-4-6:2006, IEC 61000-4-8:1993/A1:2000, IEC 61000-4-11:2004).

More detail information of Model No .:

X1 means for Width x Width = 02, 03, 04, 05, 06, 07, 08, 09, 0A, 0B, 0C, 12, 15 Where 02=25x25, 03=30x30, 04=40x40, 05=50x50, 06=60x60, 07=70x70, 08=80x80, 09=92x92, 0A=20x20, 0B=35x35, 0C=45X45, 12=120x120, $17=\phi$ 172 or 172x150 mm X2 means for thickness = 06, 07, 09, 10, 12, 15, 20, 25 or 25.4, 32, 38, 51 Where 06= 6, 07=7, 09=9 or 10, 10= 10, 12=12, 15=15, 20=20, 25=25 or 25.4, 32=32, 38=38, 51=51 mm

Where the cross list for X1&X2 as the following:

0A10, 0206, 0207, 0210, 0306, 0307, 0310, 0B06, 0B07, 0B10, 0406, 0407, 0409, 0410, 0412, 0415, 0420, 0425, 0C07, 0C10, 0509, 0510, 0512, 0515, 0520, 0525, 0610, 0615, 0620, 0625, 0638, 0710, 0715, 0720, 0725, 0815, 0820, 0825, 0832, 0838, 0925, 0932, 0938, 1225, 1232, 1238, 1738, 1751

X3 means for bearing type = S, B, H, C

Where B = Dual Ball, S = Sleeve, C = Ball + Sleeve, H = HTLS, F = Free Wheel X4 means for rated voltage =1 (12V), 2 (24V), 3 (32V), 4(48V), 5(5V), A(3V), B (25.5V), C(42V), D(18V), E(15V)

X5 means for rotation speed =T, U, S, H, M, L, E, V or 7, 6, 5, 4, 3, 2, 1, 0.

Where T or 7 means speed higher than U or 6 speed code,

U or 6 means speed higher than S or 5 speed code,

S or 5 means speed higher than H or 4 speed code.

H or 4 means Standard-high speed code,

M or 3 means Middle speed code.,

L or 2 means Low speed code,

E or 1 means speed lower than L speed code.

V or 0 means speed lower than E speed code.

X6, X7, X8 means the internal code to distinguish the wiring, frame and blade type or the dimension of the screw hole and or the color of the above material and also for special printing characters on the label requested by the client.

Cost is themy Tuned and

Supervisor