


Speaker Specification

Customer's Model No.			Customer			
Kepo Model No.		KPSP2750PN-08/0.25A		Size	Φ 27mm	No. J19553
No.	Item	Specification		Test Condition		
1	Impedance	8Ω± 15%		at 800Hz		
2	Resonant Fr. (f _o)	550Hz± 20%				
3	Frequency Range	F0-5.5KHz				
4	Rated Power	0.25W				
5	Max Power	0.5W				
6	S.P.L.	90± 3dB		0.1W / 0.1M at 0.8, 1.0,1.2,1.5KHz		
7	Distortion	Max 5%		at rated power 1.0kHz		
8	Sweep Test	must be normal		at sine wave 1.41 V		
9	Load Test	after test meet item 8		rated noise power, 24 Hrs.		
10	Heat Test	after test meet item 8		50± 2℃ 5Hrs.		
11	Cold Test	after test meet item 8		-20± 2℃ 5Hrs.		
12	Humidity Test	after test meet item 8		40± 2℃ ,90/95%R.H. 5Hrs.		
13	Weight					
14	Polarity Test	When supplied plus D.C. voltage to (+) terminal, the cone must move to forward.				
15	Note					


[dB / 20.000u Pa]

Output Response(receiver) - Input (Magnitude)

Working : Input : Input : SSR Analyzer

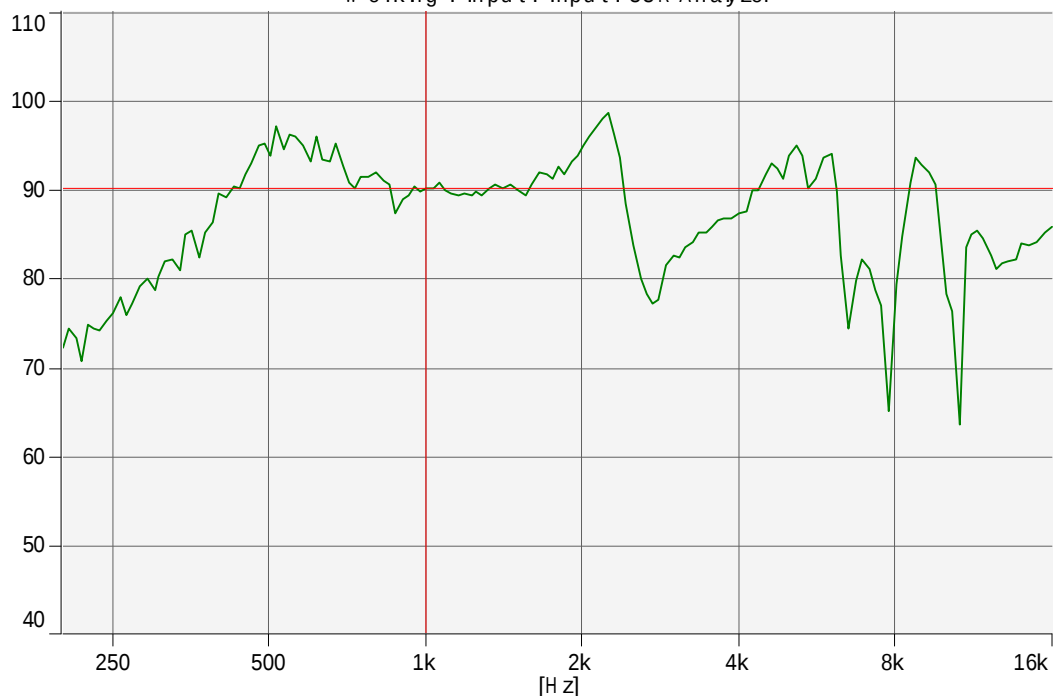

Dimensions:

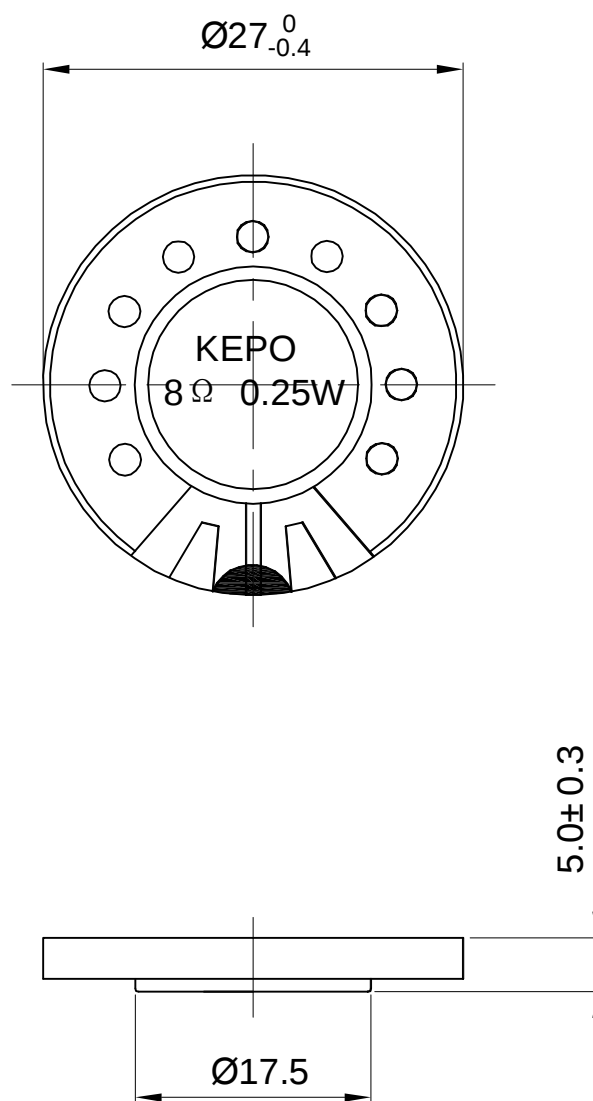

FIRST ANGLE PROJECTION

UNIT : mm
Tolerance : ± 0.2