
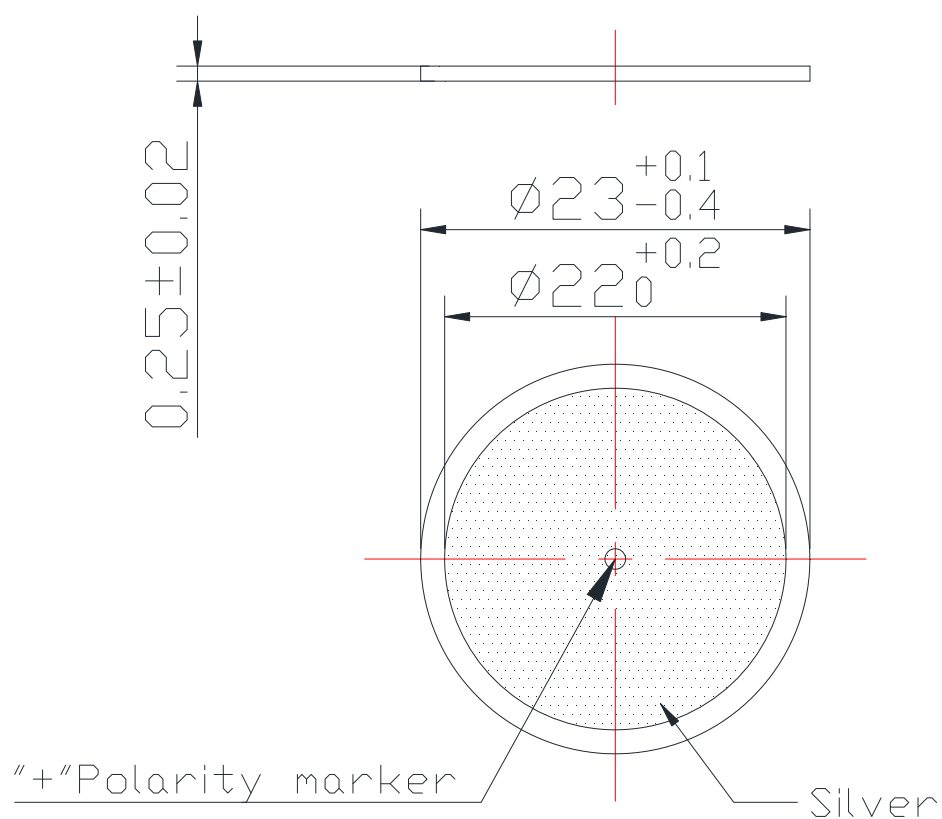


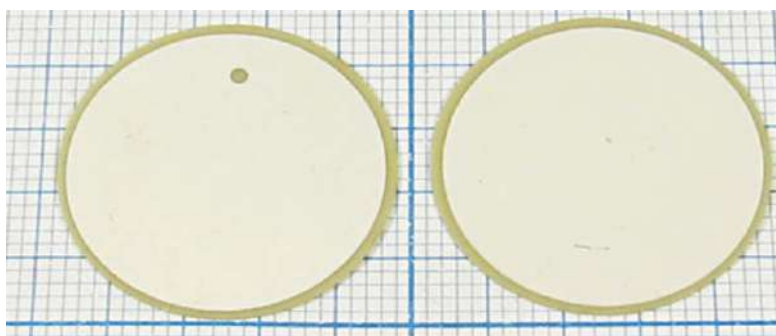

Technical requirements: (25° C ± 1° C, 1KHz)

1, Fr: 90 ± 10 kHz ; Coupling coefficient $K_p > 0.6$

2, Pass band width $\Delta f / f_r \geq 18\%$

3, Electrostatic capacitance $C: 33 \pm 30\% \text{ nF}$.

4, Silver layer is bright, no oxidation, lack of silver and other phenomena.

5. The products meet the environmental protection requirements of EU.

Drawn		Name	Ceramic Elements	
Checked			PZT- $\varnothing 23 \times 0.25 \text{ T}$	
Approved		DWG NO.	VS210913010	UNIT
Date	210913			mm



宁波福爱斯电子有限公司