



P&Q Curve

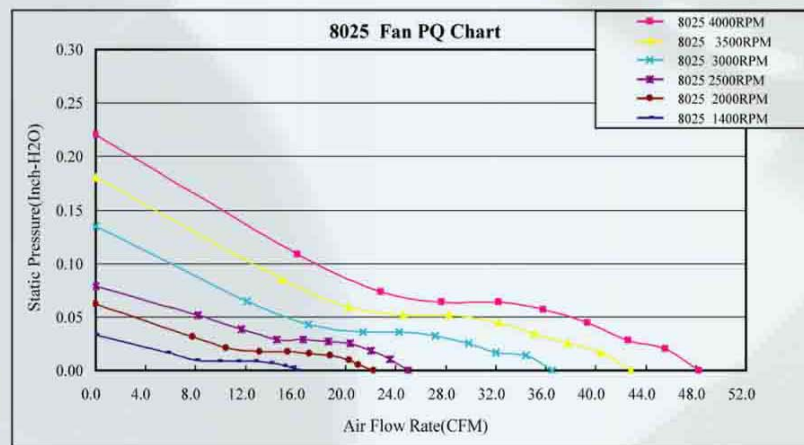

Dimensions Drawing

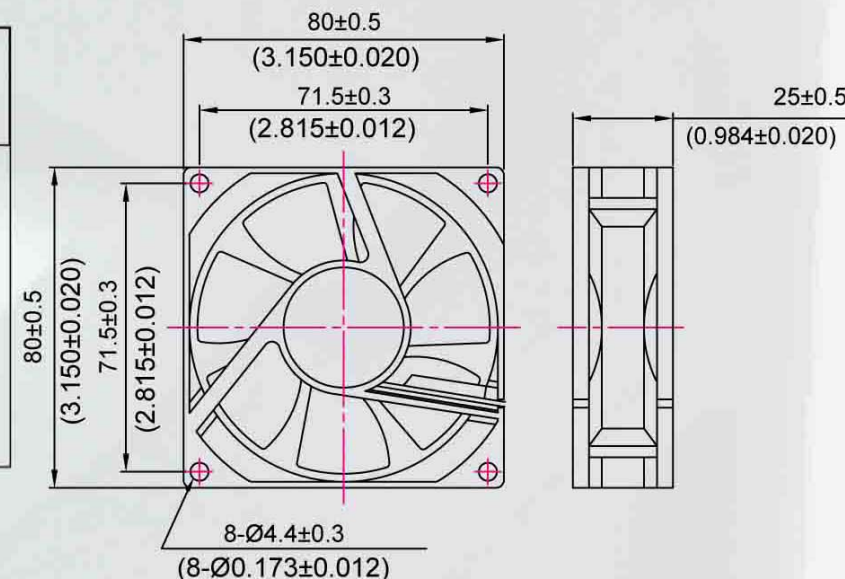

Specifications

- Material : impeller & Frame : Plastic(UL 94V-O)
- Lead Wires :
UL 1007 AWG#26 Or Equivalent
Red Wire Positive(+), Black Wire Negative(-), Yellow Wire Or Blue Wire Signal(FG)
- Function type is optional
- The max air flow and the speed are measured in free air; max air pressure is measured at zero air flow
- Noise is measured in anechoic chamber in free air, one meter from intake side
- All readings are typical values at rated voltage
- Specifications are subject to change with notice
- Additional special function may be added according to the requirement of customer

Model	Rated Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise (dBA)
TFD-8025TH12X	12	0.34	4.08	4000	48.22	0.22	<37
TFD-8025HH12X	12	0.28	3.36	3500	42.83	0.18	<35
TFD-8025H12X	12	0.16	1.92	3000	36.48	0.14	<33
TFD-8025M12X	12	0.11	1.32	2500	25.02	0.08	<28
TFD-8025L12X	12	0.08	0.96	2000	22.26	0.06	<23
TFD-8025LL12X	12	0.06	0.72	1400	16.06	0.03	<15.3
TFD-8025SL24X	12	0.05	0.6	1200	14.61	0.03	<11.9
TFD-8025TH24X	24	0.22	5.28	4000	48.22	0.22	<37
TFD-8025HH24X	24	0.18	4.32	3500	42.83	0.18	<35
TFD-8025H24X	24	0.14	3.36	3000	36.48	0.14	<33
TFD-8025M24X	24	0.1	2.4	2500	25.02	0.08	<28
TFD-8025L24X	24	0.06	1.44	2000	22.26	0.06	<23