


8840 N. Greenview Drive, Middleton, WI 53562

	Init.	Date
Originator:	<i>P. H.</i>	<i>4-2-04</i>
Approved By:	<i>Dw.</i>	<i>4/2/04</i>

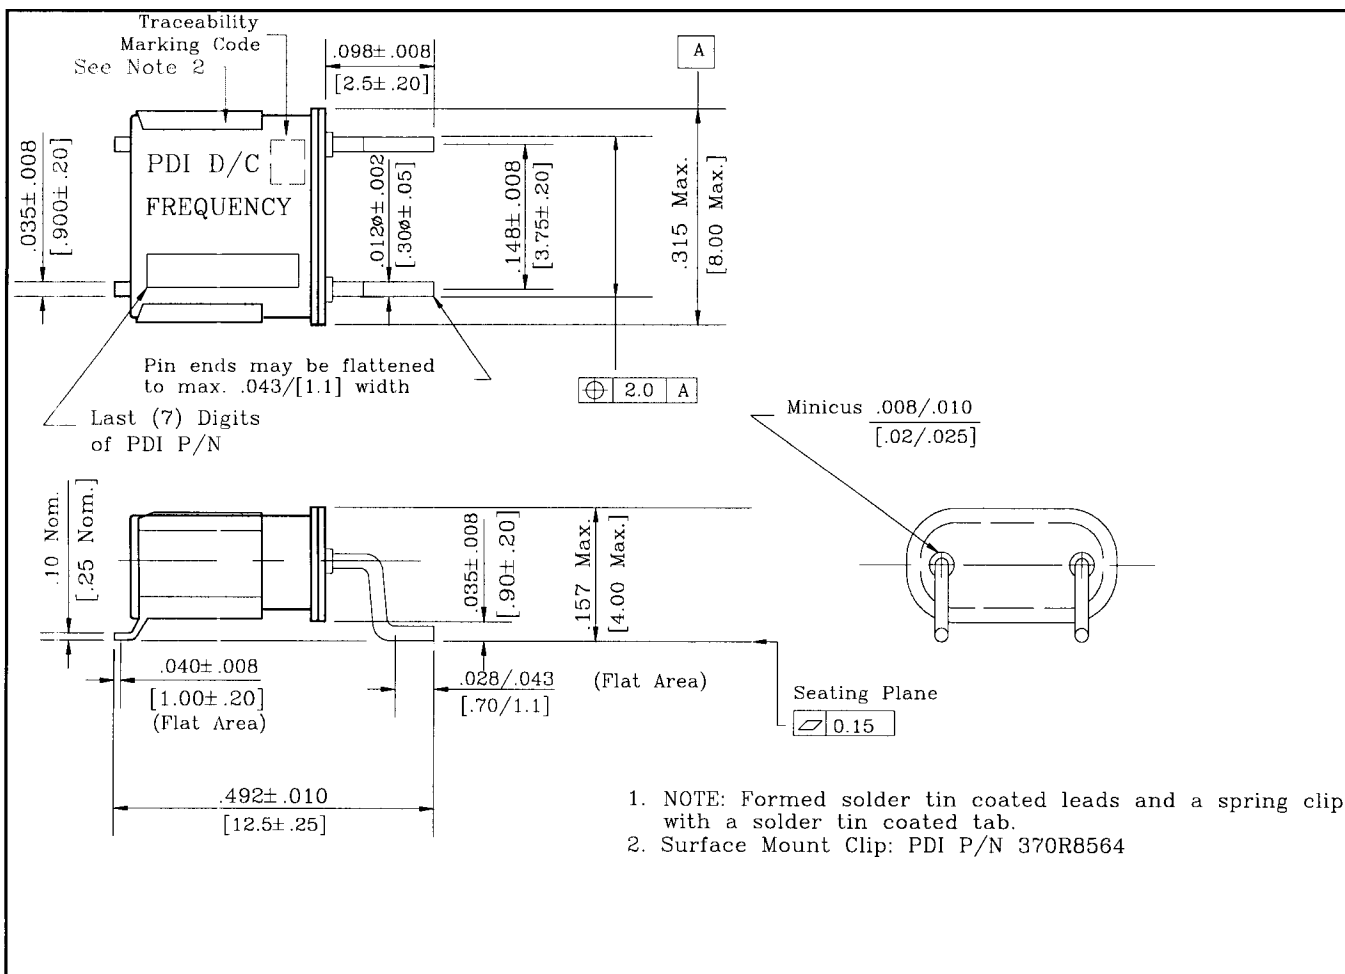

Tol. unless otherwise specified	decimal: 0.XXX=±0.004; 0.XX=±0.010 Metric: ±0.1
--	--

Special Instructions

NOTE: Temperature Stability
 (@ +10°C to +25°C): ±20ppm
 Spurious: Down 3x actual resistance
 (-55°C to +85°C)

Frequency:	25.910000 MHz
Oscillation Mode:	Fnd
Rs [Max Series Resistance] in Ohms:	20
Tolerance @ 25°	± 20 ppm
Operating Temperature Range [°C]:	-10 to 70
Max Change over temp. range:	± 50 ppm
Drive Level:	100 uW
Seal Method	RW
Co [Shunt Capacitance]:	6.5 pF Max
C1 [Motional Capacitance]:	24.0fF±15%
CI [Load Capacitance]:	20pf±0.5
Aging:	± 3 ppm

UM-1 Gull Wing Surface Mount Crystal w/Dual Prong Clip

PDI Part No: **U125910XFSB20GX**

Formerly: 11990G

Rev: A ECN: E0408

Date: 4/2/04